

OFFICELINE50 SUSPENDED LUMINAIRE

OL50H-148302-HSSIN

Project	
Type	
Notes	
Amount	
Date	

GENERAL

Housing Color: silver
 RAL: similar to RAL 9006
 Protection rating: IP20
 Protection Class: Class I

LED

Luminous Flux: 6300 lumen
 Output: LED high Output Sensor
 Colour temperature: 3000K
 Lifetime: L80 B10 50.000h
 Energy efficiency class: D

OPTICS


Optics: BAP-Louvre black specular

ELECTRICS

Power: 63.9 watt
 Driver: incl. LED driver
 Dimmability: DALI
 Circuit breaker type B16: 28pcs.


DIMENSIONS

Length: 1449 mm
 Width: 50 mm
 Height: 80.5 mm
 Weight: 3.3 kg

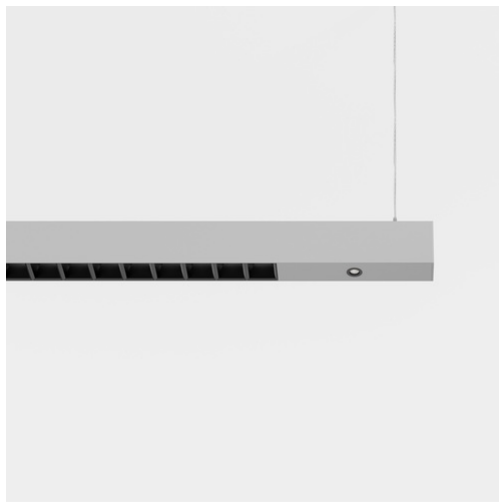

officeLINE50 Suspended luminaire luminaire made of extruded aluminium profile; luminaire with fine-textured matt silver powder-coated finish - similar to RAL 9006; direct/indirect light emission; through-wiring 5-pole; incl. LED driver DALI; light control directly through special faceted BAP-Louvre black high gloss for lower glaring (UGR<19) ; incl. white canopy with transparent power feed cable as well as flexibly positionable suspension cable hangers (2000mm) and quick-release clamps for infinitely variable adjustment of the mounting height; LED high Output Sensor option with a System luminous flux of 6300lm at 63.9W; colour temperature 3000K; CRI > 80; Binning initial MacAdam ≤ 3 SDCM; retinal blue light hazard according to IEC TR 62778 risk group RG 1 (unlimited) - no risk; Lifetime: L80 B10 50.000h; protection type IP20; protection class I; dimensions: LxWxH: 1449x50x80.5mm; Weight: 3.3kg; light source and driver replaceable by a qualified electrician

LIGHT DISTRIBUTION



DRAWING

